

DMC - 1 output up to 450W(VA)




TVDMCxxxBB01

230 Vac dimmer with built-in radio receiver, pushbuttons UP/DOWN and OFF and 1 output for the control of loads up to 450W(VA).

It is ideal for wall-mounted installation.

- Automatic configuration of type of load
- Manual selection of the LED mode
- Replaces existing switches with no need for extra wiring
- 100% protected against short circuits
- If controlled by a 7-channel transmitter, it is possible to pre-set 4 light scenes
- Light memory function (it memorises the light level of the last time it was switched on)
- Fade function (gradual light ON and OFF)
- Possibility to memorize up to 16 transmitters

Interchangeable frames available on request:

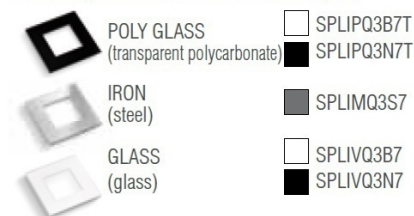

TECHNICAL SPECIFICATIONS:

Power supply: **230 Vac, 50/60Hz**

Adjustable load (Min.-Max.):

- resistive loads (R): **25W-450W**


- inductive and capacitive loads (L,C): **25VA-450VA**

- LED: **7-100W**


Protection rating: **IP20**

Dimensions: **86 x 86 x 36 mm**


230 V_{AC} DIMMER RECEIVER



WITHOUT MECHANICAL BUTTON



WITH MECHANICAL PUSHBUTTON CONNECTED TO THE LOAD



WITH MECHANICAL PUSHBUTTON CONNECTED TO THE POWER SUPPLY