

## DMC - 2 outputs up to 250W(VA) each




### TVDMCxxxBB02

230 Vac dimmer with built-in radio receiver, pushbuttons UP/DOWN and OFF and 2 outputs for the control of loads up to 250W (450W or 450VA in total).

It is ideal for wall-mounted installation.

- Automatic configuration of type of load
- Manual selection of the LED mode
- Replaces existing switches with no need for extra wiring
- 100% protected against short circuits
- If controlled by a 7-channel transmitter, it is possible to pre-set 4 light scenes
- Light memory function (it memorises the light level of the last time it was switched on)
- Fade function (gradual light ON and OFF)
- Possibility to memorize up to 16 transmitters

Interchangeable frames available on request:

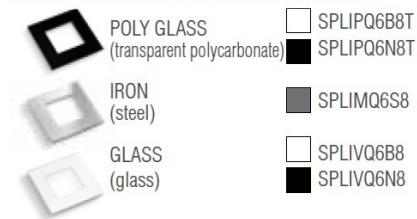

### TECHNICAL SPECIFICATIONS:

Power supply: **230 Vac, 50/60Hz**

Adjustable load x output (Min.-Max.):

- resistive loads (R): **25W-250W**

- inductive and capacitive loads (L,C): **25VA-250VA**

- LED: **7-100W**

Maximum total load (R,L,C): **450W, 450VA**

Protection rating: **IP20**

Dimensions: **86 x 86 x 36 mm**

### 230 V<sub>AC</sub> DIMMER RECEIVER

